

 **TEREX**® | BID-WELL

2418/3424/3430

WORKBRIDGE



WORKS FOR YOU.™

FEATURES



FINISHING THE JOB

Terex Bid-Well workbridge is a necessary piece of equipment for any paving job including bridges, roads, canals, side slopes, dams, highways, airports or slabs. The all welded steel tubular frame and expanded metal decking provide your finishers with the necessary workspace platform to finish your paving job. Workbridges are available in widths ranging from 24 to 34 inches / 61 to 86 cm providing enough room for your finishers to tine, cure, hand finish and lay burlap behind your Terex Bid-Well roller paver.

LENGTH TO SPARE

Terex Bid-Well workbridges are extremely versatile offering a variety of section lengths to build a workbridge that can span your concrete pour. The maximum spans can reach as far as 105 ft / 32 m for the 2418 model, 129 ft / 36.6 m for the 3424 model and 165 ft / 50.29 m for the 3430 model. With the available cable assist accessory for all models, Terex Bid-Well workbridge can span even farther to accommodate large decks and slabs.

VARIETY

Terex Bid-Well offers a large selection of workbridge ends and bogie styles to meet your needs as a contractor. Each model of workbridge can be fitted to ride on screed pipe or terrain, powered or non powered. Three styles of workbridge ends provide you with the means to finish your deck or slab to job specifications.






VERSATILITY

Do you have a skewed deck to pour? Does your deck have a 5 ft / 1.5 m high rebar sidewall? Do you need a workbridge for a canal or side slope? Not a problem. Terex Bid-Well has a workbridge to accommodate all of these scenarios and many more. For more than 50 years, Terex Bid-Well has been designing and building workbridges to accompany its roller pavers for every possible job specification and scenario--just another example of how Terex Bid-Well Works for You.



TEREX | BID-WELL

WORKBRIDGE

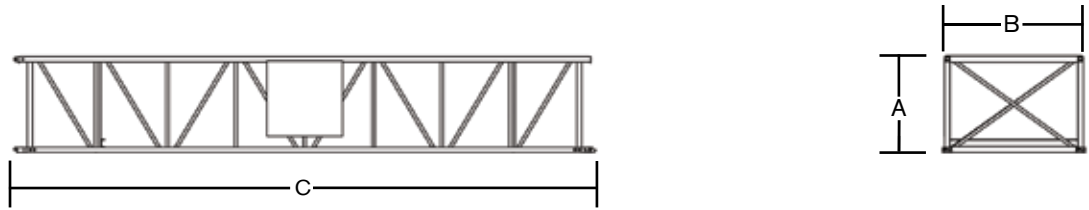

Telescoping




DIMENSIONS AND WEIGHTS

2418		3424		3430	
A	18 in / 45 cm	A	24 in / 60 cm	A	30 in / 76 cm
B	24 in / 60 cm	B	34 in / 86 cm	B	34 in / 86 cm
C	12 ft / 3.65 m	C	12 ft / 3.65 m	C	12 ft / 3.65 m
D	6 ft / 1.82 m	D	6 ft / 1.82 m	D	6 ft / 1.82 m
E	3 ft / .91 m	E	3 ft / 0.91 m	E	3 ft / 0.91 m
Max Span	105 ft / 32 m	Max Span	129 ft / 36.6 m	Max Span	165 ft / 50.29 m
Weight		Weight		Weight	
12ft	188 lbs / 85 kg	12ft	250 lbs / 113 kg	12ft	256 lbs / 116.12 kg
6ft	106 lbs / 48 kg	6ft	130 lbs / 58.96 kg	6ft	186 lbs / 84.36 kg
3ft	66 lbs / 29 kg	3ft	79 lbs / 35.83 kg	3ft	93 lbs / 42.18 kg
Telescoping		Telescoping		Telescoping	
Length	15 ft / 4.6m to 25 ft / 7.6 m	Length	15 ft / 4.6m to 25 ft / 7.6 m	Length	15 ft / 4.6m to 25 ft / 7.6 m
Weight	665 lbs / 301.6 kg	Weight	793 lbs / 359.6 kg	Weight	863 lbs / 391.45 kg

WORKBRIDGE ENDS

Terex Bid-Well offers three styles of workbridge ends to help you meet job specifications:

- Group 1 Workbridge ends offer the option of concave, flat flanged or pneumatic wheels on an independent swivel yoke or bogie axle frame
- Group 2 Workbridge ends offer the same wheel options as Group 1 with a “j-drop” bogie mounting system
- Group 3 Workbridge ends offer the same wheel options as Group 1 & 2 with adjustable height tubular steel legs

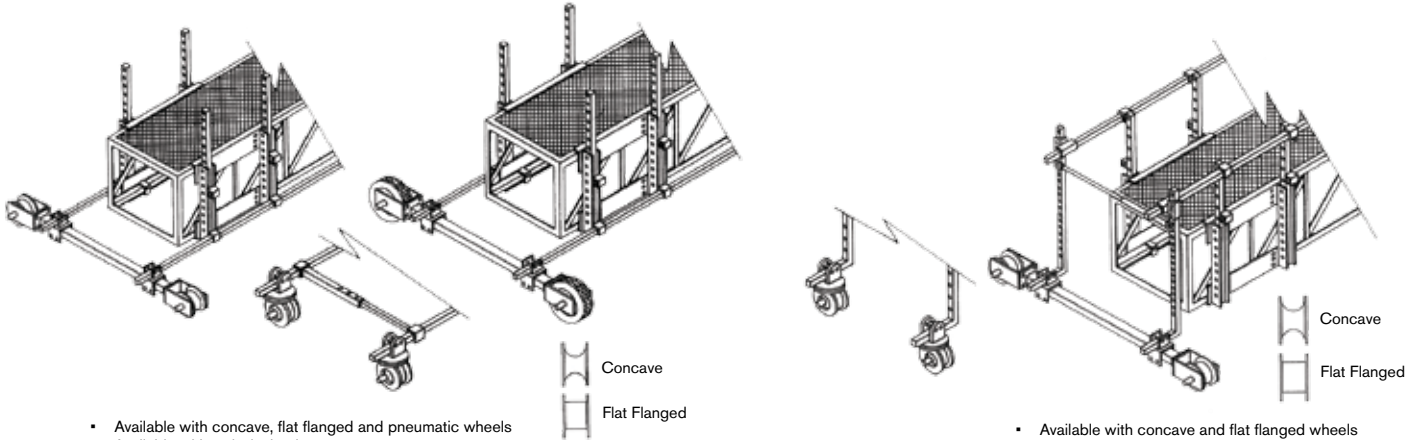


- Available with concave, flat flanged and pneumatic wheels
- Available with swivel wheels

- Available with concave and flat flanged wheels
- Available with swivel wheels

GROUP 1 WORKBRIDGE END

GROUP 2 WORKBRIDGE END

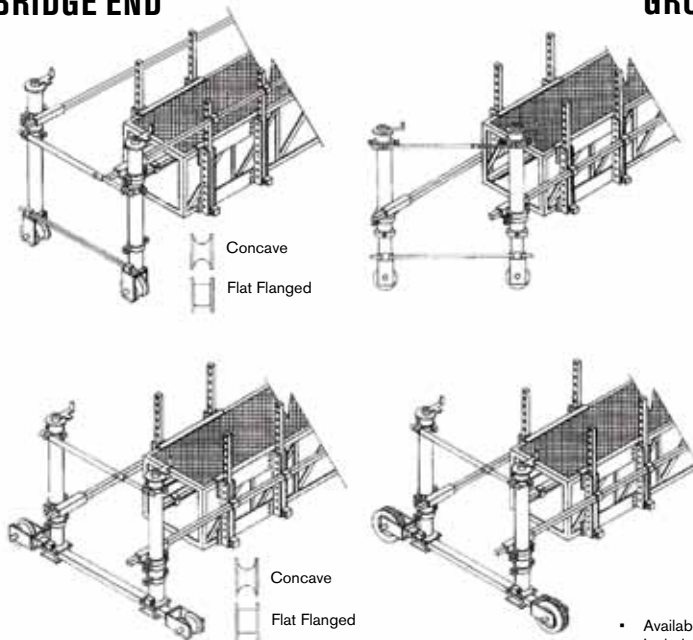

GROUP 3 WORKBRIDGE END

- Available with concave, flat flanged and pneumatic wheels
- Includes screw jack leg for height adjustment
- Can be set on a skew

www.bid-well.com

Effective Date: June 2011. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex is a registered trademark of Terex Corporation in the USA and many other countries. Copyright 2011 Terex Corporation.

Terex Bid-Well PO Box 97, Canton, SD 57013 USA
Tel +1 605 987 2603 Fax +1 605 987 2605 www.bid-well.com

